


SWITCHMODE SERIES NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The MJ10022 and MJ10023 darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

FEATURES:

- *Continuous Collector Current - $I_C = 40$ A
- *Switching Regulators
- *Inverters
- *Solenoid and Relay Drivers
- *AC and DC Motor Controls




NPN
MJ10022
MJ10023


40 AMPERE
POWER DARLINGTON
TRANSISTORS
350-400 VOLTS
250 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	MJ10022	MJ10023	Unit
Collector-Emitter Voltage	V_{CEV}	450	600	V
Collector-Emitter Voltage	$V_{CEO(SUS)}$	350	400	V
Emitter-Base Voltage	V_{EBO}	8.0		V
Collector Current-Continuous	I_C	40		A
-Peak	I_{CM}	80		
Base current	I_B	20		A
Total Power Dissipation @ $T_C=25^\circ C$	P_D	250		W
@ $T_C=100^\circ C$		143		W
Derate above $25^\circ C$		1.43		W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +200		$^\circ C$




TO-3



PIN 1.BASE
2.EMITTER
COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.7	$^\circ C/W$

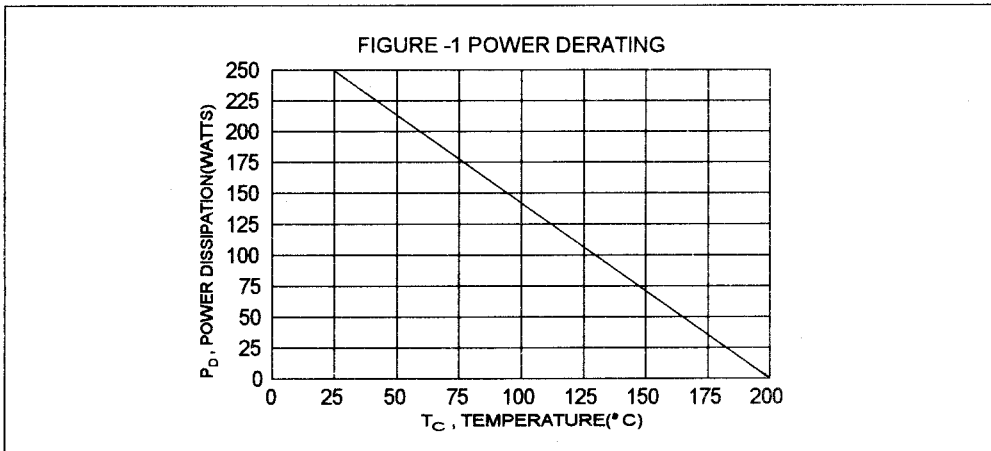

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage ($I_C = 100 \text{ mA}, I_B = 0$)	MJ10022 MJ10023	$V_{CE(SUS)}$	350 400	V
Collector Cutoff Current ($V_{CEV} = \text{Rated Value}, V_{BE(OFF)} = 1.5 \text{ V}$) ($V_{CEV} = \text{Rated Value}, V_{BE(OFF)} = 1.5 \text{ V}, T_c = 150^\circ\text{C}$)		I_{CEV}	0.25 5.0	mA
Collector Cutoff Current ($V_{CEV} = \text{Rated Value}, R_{BE} = 50 \Omega, T_c = 100^\circ\text{C}$)		I_{CER}	5.0	mA
Emitter Cutoff Current ($V_{EB} = 2.0 \text{ V}, I_C = 0$)		I_{EBO}	175	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 10 \text{ A}, V_{CE} = 5.0 \text{ V}$)		hFE	60 600	
Collector - Emitter Saturation Voltage ($I_C = 20 \text{ A}, I_B = 1.0 \text{ A}$) ($I_C = 40 \text{ A}, I_B = 5.0 \text{ A}$) ($I_C = 20 \text{ A}, I_B = 1.0 \text{ A}, T_c = 100^\circ\text{C}$)		$V_{CE(sat)}$	2.2 5.0 2.5	V
Base - Emitter Saturation Voltage ($I_C = 20 \text{ A}, I_B = 1.2 \text{ A}$) ($I_C = 20 \text{ A}, I_B = 1.2 \text{ A}, T_c = 100^\circ\text{C}$)		$V_{BE(sat)}$	2.5 2.5	V
Diode Forward Voltage ($I_F = 20 \text{ A}$)		V_F	5.0	V

DYNAMIC CHARACTERISTICS


Output Capacitance ($V_{CB} = 10 \text{ V}, I_E = 0, f = 1.0 \text{ kHz}$)		C_{ob}	150 600	pF
---	--	----------	------------	----

SWITCHING CHARACTERISTICS


Delay Time	$V_{CC} = 250 \text{ V}, I_C = 20 \text{ A}$ $I_{B1} = 1.0 \text{ A}, V_{BE(off)} = 5.0 \text{ V}$ $t_p = 50 \mu\text{s}, \text{Duty Cycle} \leq 2\%$	t_d	0.2	us
Rise Time		t_r	1.5	us
Storage Time		t_s	2.5	us
Fall Time		t_f	1.1	us

(1) Pulse Test: Pulse width = $300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

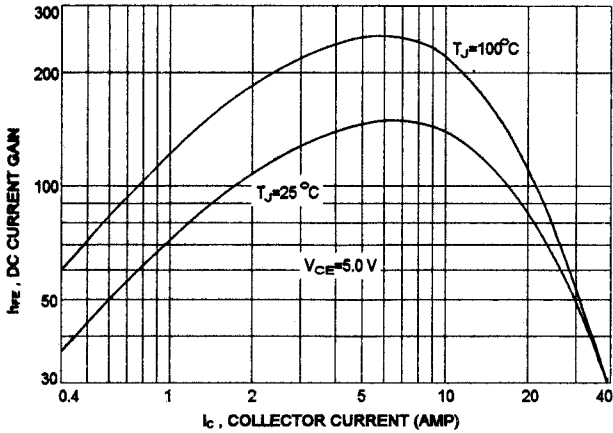


COLLECTOR SATURATION REGION

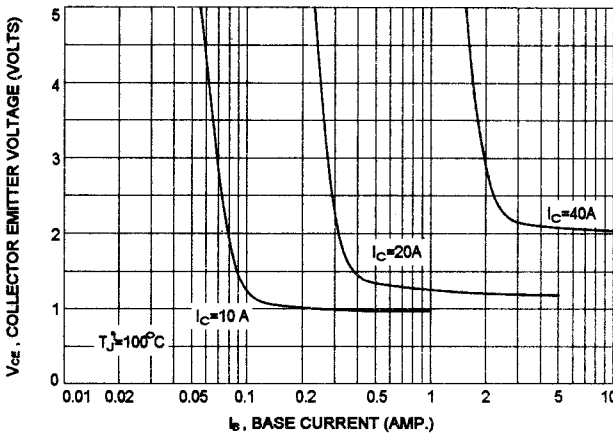


COLLECTOR-EMITTER SATURATION VOLTAGE

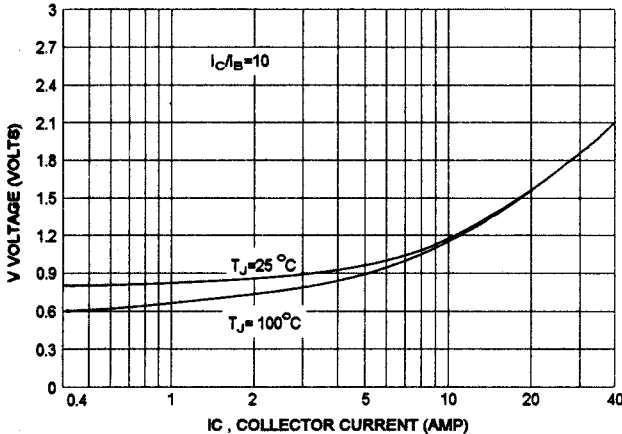


BASE-EMITTER SATURATION VOLTAGE

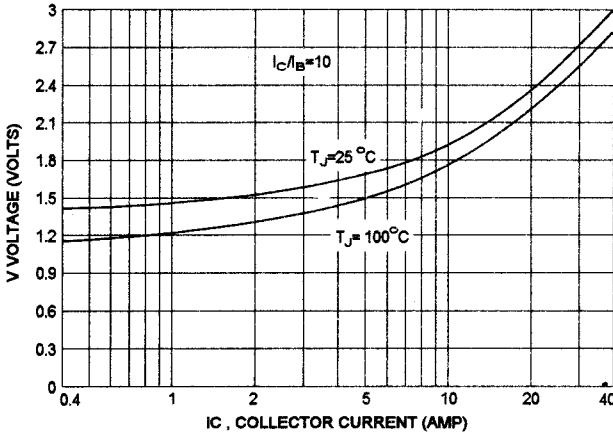


COLLECTOR CUT-OFF REGION

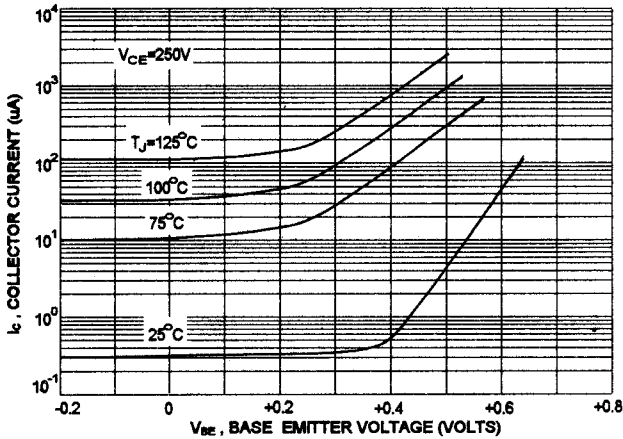


OUTPUT CAPACITANCES

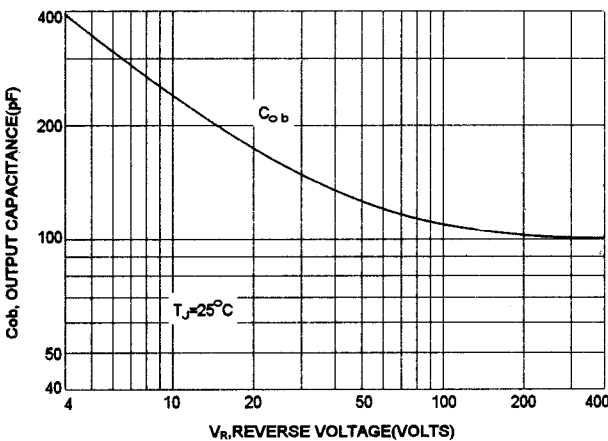


TURN-ON TIME

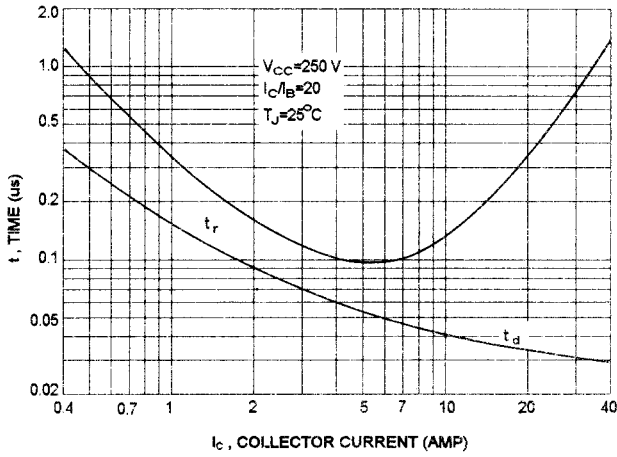


TURN-OFF TIME

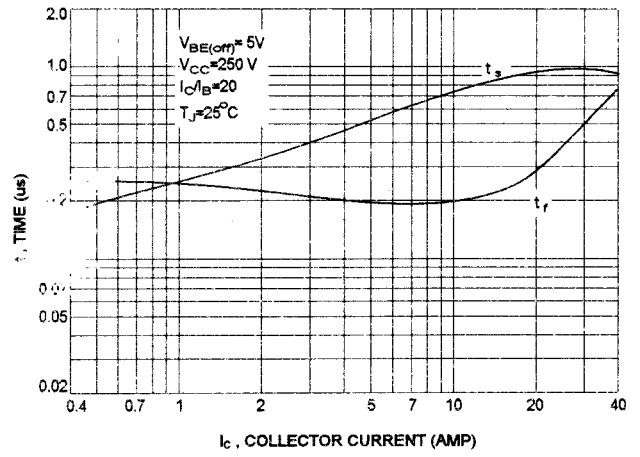

ACTIVE REGION SAFE OPERATING AREA

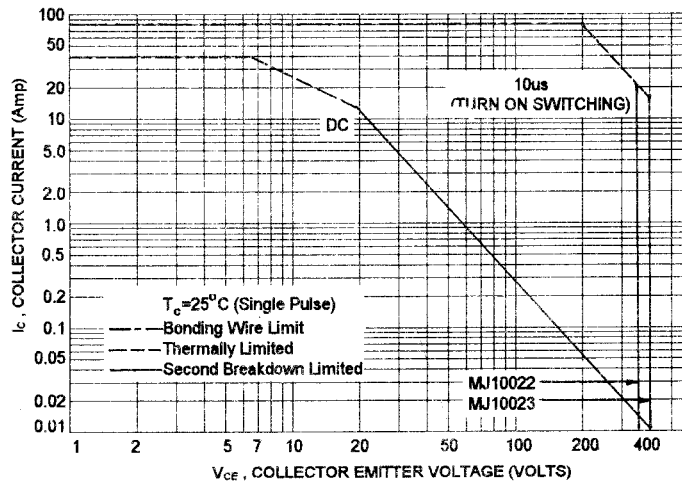

REVERSE BIAS SWITCHING SAFE OPERATING AREA

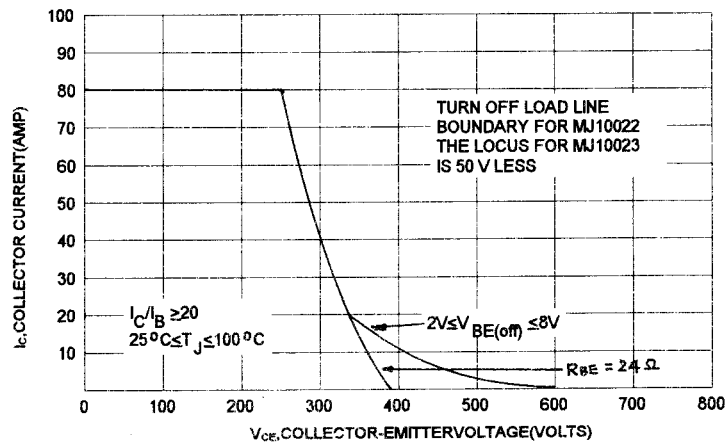

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.